



# ARMADILLO



## IT. Distributore

Il solido armadietto in lamiera verniciata anti-corrosione e resistente agli agenti atmosferici, equipaggiato con chiusura a chiave, previene l'utilizzo del gruppo di erogazione da persone non autorizzate. Il fungo di emergenza inserito all'interno, ha la doppia valenza di interruttore di sicurezza in caso di necessità e di blocco del passaggio di corrente alla pompa quando lo sportello frontale è chiuso. La pompa è alloggiata all'interno con supporti antivibranti. Disponibile in più modelli con caratteristiche differenti.

### Caratteristiche

- portata 45,60,80,100 l/min
- voltaggio 12V - 24V - 230V
- entrata/uscita 1" x 1" BSP-G
- pistola automatica
- fluidi diesel

### Opzioni

- motore 115V su richiesta

## EN. Dispenser

The sturdy cabinet in anti-corrosive coating metal sheet resistant to atmospheric agents, equipped with key lock, to restrict non authorized use of dispensing unit. The mushroom-type emergency button fitted inside the pump acts as a safety switch, when needed, and also prevents current from passing to the pump when the front panel is close. The pump is located inside on vibration damper supports. Several models with different features are available.

### Features

- flow range 45,60,80,100 l/min
- voltage 12V - 24V - 230V
- in/out 1" x 1" BSP-G
- nozzle automatic
- fluids diesel

### Options

- upon request 115V engine



### Mascherina personalizzabile\*

\* subordinata ad un minimo d'ordine annuale

### Customizable faceplate\*

\* subject to minimum annual ordered quantity




ciclo di lavoro - duty cycle



motore - engine



### Ingombri - Overall Dimensions (mm)

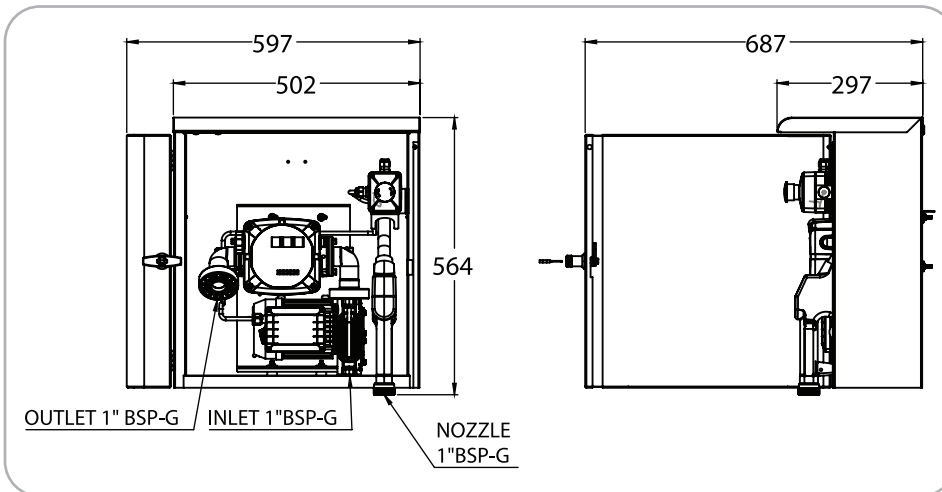

Kit filtro  
Filter Kit

Ref.	Model	l/min	V				Kg		
						LxWxH(mm)		N° boxes europallet	N° boxes europallet
AR502U2	ARMADILLO 50	50	12	60l/min	4m, Ø19mm	590X390X590	25	8	12
AR504U2	ARMADILLO 50	50	24	60l/min	4m, Ø19mm	590X390X590	25	8	12
AR6A2U2	ARMADILLO 60	60	12	60l/min	4m, Ø19mm	590X390X590	29	8	12
AR6A4U2	ARMADILLO 60	60	24	60l/min	4m, Ø19mm	590X390X590	29	8	12
AR6Z0U2	ARMADILLO 60	60	230	60l/min	4m, Ø19mm	590X390X590	28	8	12
AR800U4	ARMADILLO 80	80	230	120l/min	4m, Ø25mm	590X390X590	34	8	12
AR100U4	ARMADILLO 100	100	230	120l/min	4m, Ø25mm	590X390X590	34	8	12