

Vaso autoclave con membrana intercambiabile per circuiti di acqua sanitaria.
 Pressure Tank with replaceable membrane for pressurized systems of sanitary water.
 Réservoir sous pression à vessie remplaçable pour systèmes d'eau sanitaire.
 Vaso agua fría con membrana recambiable para circuitos de agua sanitaria.

Marcati CE secondo la Direttiva **PED 2014/68/UE**
 CE marked according to Directive
 Avec le marque CE selon la Directive
 Todos los vasos están marcados según la Directiva Europea

Colore della verniciatura esterna
 External finish color
 Couleur de la peinture externe
 Pintura exterior

RAL 5015

Pressione di precarica standard
 Standard pre-set pressure
 Pression de precharge standard
 Presión de precarga estándar

≤ 150

1,5 bar

> 150

2 bar

Pressione massima d'esercizio - Maximum working pressure
 Pression maximale d'exercice - Presión máxima de trabajo


10 bar

Garanzia sul prodotto mesi: - Warranty months:
 Garantie mois: - Garantía meses:

24



AO

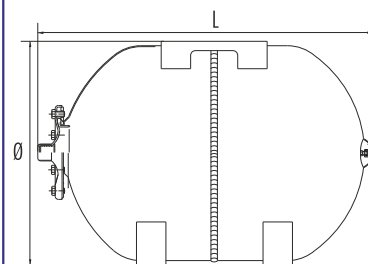

AO

Modello Model Modèle Modelo	Codice Code Code Codigo	Altezza Height Hauteur Altura H (mm)	Diametro Diameter Diamètre Diámetro Ø (mm)	Lunghezza Length Longeur Longitud L (mm)	Membrana in gomma Rubber membrane Vessie en gomme Membrana en goma	Temperatura d'esercizio Working temperature Température d'exercice Temperatura de trabajo min MAX		Imballo Packing Emballage Embalaje P x L x H (mm)	Attacco Connection Raccordement Conexión (inch)
A018	IIGOE11B01CCO	305	280	430	EPDM	-10 °C	+100 °C	(Pz 4) 520 x 580 x 610	1"
A024	IIIOE11B01ECO	305	280	485	EPDM	-10 °C	+100 °C	(Pz 4) 520 x 580 x 610	1"
A035	IJJOE11B01EAO	376	365	440	EPDM	-10 °C	+100 °C	(Pz 1) 380 x 400 x 460	1"
A050	IIKOE11B01EAO	380	365	585	EPDM	-10 °C	+100 °C	(Pz 1) 380 x 400 x 575	1"
A060	IILOE11B01EAO	385	365	670	EPDM	-10 °C	+100 °C	(Pz 1) 380 x 400 x 700	1"
A080	IIMOE11B01EAO	430	410	725	EPDM	-10 °C	+100 °C	(Pz 1) 430 x 450 x 730	1"
A0100	IINOE11B11EAO	520	495	685	EPDM	-10 °C	+100 °C	(Pz 1) 510 x 540 x 700	1"
A0150	IIPOE11B11EAO	585	550	820	EPDM	-10 °C	+100 °C	(Pz 1) 570 x 610 x 850	1"
A0200	IIQOG21B11FA1	628	600	920	EPDM	-10 °C	+100 °C	(Pz 1) 620 x 630 x 1030	1 1/4"
A0300	IISOG21B11FA1	680	650	1082	EPDM	-10 °C	+100 °C	(Pz 1) 680 x 700 x 1290	1 1/4"

Controflangia inox AISI 304 disponibile su richiesta.
Stainless steel AISI 304 counter flange available on request.
Contre bride inox AISI 304 disponible sur requête.
Contra brida en acero inox AISI 304 bajo demanda.